


Deep groove ball bearing 6000, 6200, 6300, 6800, 6900series

[Deep groove ball bearing](#) 6000, 6200, 6300, 6800, 6900series

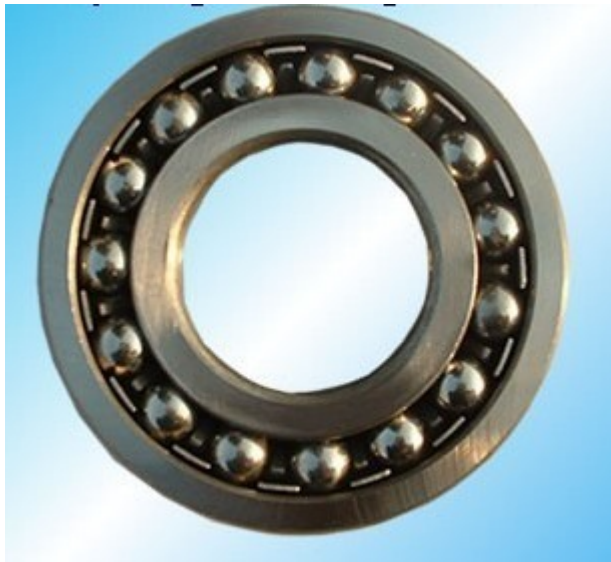

We are a leading enterprise of bearings. The company lies in the south bank of Hangzhou bay, adjacent the highway of Shanghai, Hangzhou and Ningbo. It is 65 KM away from the airport of Ningbo; 60 KM from the International Container Quay of Ningbo. It is 320KM distances from the International airport of Shanghai; 300KM distances from the International Container dock of Shanghai. It is near to the Hangzhou bay -bridge. The Hangzhou bay-bridge is being built by them. Our company own brand are: KJYJ 、JHOK. The quality certificate of ISO9001 has been passed by us. We company has got the Export-Licence. There are at least 5000 square meters building for manufacturing .There're total square are around 8500 square meters. The employees are more than 500. The main productions are small bearings. There are some advance automatic machines for production. Annual output are more than 40 millions. The productions are being sold all over the world by us.

We export bearings with good quality and low price.
Please contact us to know details.

[Deep-groove ball bearings](#) are the most popular of the antifriction bearing types. They are available in a broad range of sizes, from [miniature ball bearings](#) with outside diameter of less than 9mm to extra-large bearings that exceed 1, 500mm in diameter. Small and mid. Size bearings are also available in a variety of shield, seal and snap ring arrangements. Big ones normally are fitted with solid brass or steel cages.

SPECIFICATIONS:

- 1, Original ,KJYJ BEARINGS
- 2, ISO9001-2000 PASSED
- 3, Packing: Tube/Box

PRODUCTS RANGE:

- 6000SERIES: 6000-6016 OPEN, ZZ, 2RS, NR, UG
- 6200SERIES: 6200-6216 OPEN, ZZ, 2RS, NR, UG
- 6300SERIES: 6300-6316 OPEN, ZZ, 2RS, NR, UG
- 6800SERIES: 6800-6810 OPEN, ZZ, 2RS, NR, UG
- 6900SERIES: 6900-6910 OPEN, ZZ, 2RS, NR, UG

BEARINGS SPECIFICATIONS

- 1, MATERIAL: GCR15
- 2, GRADE: ABEC-1
- 3, NOISE GRADE: Z1V1
- 4, CLEANRANCE: C0, C2, C3, C4
- 5, HAND FEELING: WITH VERY SMOOTH FEELING

BEARINGS APPLICATIONS

POWER TOOLS

MOTOR

MOTORCYCLE

PUMP

TEXTILE MACHINES

SPORT EQUIPMENT

OFFICE EQUIPMENT

Payment Terms: T/T, D/P AT SIGHT, L/C

HOPE WE CAN ESTABLISH GOOD BUSINESS RELATIONSHIP WITH YOU!!!

ITEM	Shape Dimension(mm)								Steel Ball		Basic Load Rating(KN)		Max Speed (rpm)		Weight (kg)
	Bore d		Outer Diameter D		Width B		Radius r min		Size mm	Quantity Number	Dynamic Cr	Static Cor	Grease	Oil	
	m	inch	mm	inch	m	inch	mm	inch							
	m				m										
6000 Series															
6000	10	0.3937	26	1.0236	8	0.3149	0.3	0.0236	4.763	7	4.58	1.98	2000	2800	0.018
6001	12	0.4724	28	1.1024	8	0.3149	0.3	0.0236	4.763	8	5.1	2.38	1900	2600	0.02
6002	15	0.5906	32	1.2598	9	0.3543	0.3	0.0236	4.763	9	5.58	2.85	1800	2400	0.026
6003	17	0.6693	35	1.378	10	0.3937	0.3	0.0236	4.763	10	6	3.25	1700	2200	0.036
6004	20	0.7874	42	1.6535	12	0.4724	0.6	0.0394	6.35	9	9.38	5.02	1500	1900	0.069
6005	25	0.9843	47	1.8504	12	0.4724	0.6	0.0394	6.35	10	10.1	5.85	1300	1700	0.075
6006	30	1.1811	55	2.1654	13	0.5118	1	0.0394	7.144	11	10.18	6.91	1000	1400	0.116
6007	35	1.3780	62	2.4409	14	0.5512	1	0.0433	7.938	11	12.47	8.66	9000	1200	0.155
6008	40	1.5748	68	2.6772	15	0.5906	1	0.0433	7.938	12	13.1	9.45	8500	1100	0.185
6009	45	1.7717	75	2.9528	16	0.6299	1	0.0433	8.731	12	16.22	11.96	8000	1000	0.231
6010	50	1.9685	80	3.1496	16	0.6299	1	0.0433	8.731	13	16.94	12.95	7000	9000	0.25
6011	55	2.1654	90	3.5433	18	0.7086	1	0.0591	11	12	23.28	17.86	7000	7500	0.362
6012	60	2.3622	95	3.7401	18	0.7086	1	0.0591	11	13	24.35	19.35	6300	7500	0.385
6013	65	2.5591	100	3.937	18	0.7086	1	0.0591	11.1125	13	24.66	19.74	6000	7000	0.41
6017	70	2.756	110	4.332	20	0.7874	1	0.0591	12.30	13	29.68	24.2	5600	6700	0.575

4	0	59	0	07	0	74	1	91	3						
601	7	2.95	11	4.52	2	0.78	1.	0.05	12.30	14	30.91	26.0	5300	6300	0.603
5	5	28	5	75	0	74	1	91	3			6			
601	8	3.14	12	4.92	2	0.86	1.	0.07	13.49	14	36.57	31.3	5000	6000	0.821
6	0	96	5	12	2	61	1	87	4			6			

ITEM	Shape Dimension(mm)								Steel Ball		Basic Load Rating(KN)		Max Speed (rpm)		Weight (kg)	
	Bore		Outer Diameter		Width		Radius		Size	Quantity	Dynamic	Static	Grease	Oil		
	d	D	B	r min	mm	Number	Cr	Cor								
	m	inch	mm	inch					m	inch						
6200 Series																
620	0	0	0.39	30	1.118	9	0.35	0.	0.02	4.763	8	5.1	2.38	1900	2600	0.028
			37		11		43	6	36					0	0	
620	1	2	0.47	32	1.259	1	0.39	0.	0.02	5.953	7	6.82	3.05	1800	2400	0.034
			24		8	0	37	6	36					0	0	
620	1	5	0.59	35	1.378	1	0.43	0.	0.02	5.953	8	7.65	3.72	1700	2200	0.043
			06		0	1	31	6	36					0	0	
620	1	7	0.66	40	1.574	1	0.47	0.	0.02	6.747	8	9.58	4.47	1600	2000	0.062
			93		8	2	24	6	36					0	0	
620	2	0	0.78	47	1.850	1	0.55	1.	0.03	7.938	8	9.88	6.2	1400	1800	0.102
			74		4	4	12	0	94					0	0	
620	2	5	0.98	52	2.047	1	0.59	1.	0.03	7.938	9	10.78	6.98	1200	1600	0.12
			43		2	5	06	0	94					0	0	
620	3	0	1.18	62	2.440	1	0.62	1.	0.03	9.525	9	14.97	10.0	9500	1300	0.19
			11		9	6	99	0	94				4		0	
620	3	5	1.37	72	2.834	1	0.66	1.	0.04	11.11	9	19.75	13.6	8500	1100	0.27
			80		6	7	93	1	33	25			7		0	
620	4	0	1.57	80	3.149	1	0.70	1.	0.04	12	9	22.71	15.9	8000	1000	0.37
			48		6	8	87	1	33				4		0	
620	4	5	1.77	85	3.346	1	0.74	1.	0.04	12	10	24.36	17.7	7000	9000	0.38
			17		5	9	80	1	33				1			
621	5	0	1.96	90	3.543	2	0.78	1.	0.04	12.7	10	26.98	19.8	6700	8500	0.45
			85		3	0	74	1	33				4			
621	5		2.16	10	3.937	2	0.82	1.	0.05	14.28	10	33.37	25.1	6000	7500	0.603

1	5	54	0	0	1	68	5	91	8			1				
621	6	2.36	11	4.330	2	0.86	1.	0.05	15.08	10	36.74	27.9	5600	7000	0.789	
2	0	22	0	7	2	61	5	91	1			7				
621	6	2.55	12	4.724	2	0.90	1.	0.05	16.66	10	44.01	34.1	5000	6300	0.99	
3	5	91	0	4	3	55	5	91	9			8				
621	7	2.75	12	4.921	2	0.94	1.	0.05	16.66	11	46.79	37.5	4800	6000	1.084	
4	0	59	5	3	4	49	5	91	9			9				
621	7	2.95	13	5.118	2	0.98	1.	0.05	17.46	11	66	49.5	4800	5600	1.18	
5	5	28	0	1	5	43	5	91	2							
621	8	3.14	14	5.511	2	1.02	2.	0.07	18.25	11	72.5	53	4500	5300	1.4	
6	0	96	0	8	6	36	0	87	6							

ITE M	Shape Dimension(mm)								Steel Ball		Basic Load		Max Speed (rpm)		Weigh t (kg)
	Bore		Outer Diameter		Width B		Radius r min		Size mm	Quantity Number	Dynam ic Cr	Stati c Cor	Grease	Oil	
	m	inch	mm	inch	m	inch	mm	inch							
	m				m										
6300 Series															
630	1	0.393	35	1.378	1	0.433	0.	0.023	6.35	7	5.88	3.47	20000	2600	0.054
0	0	7			1	1	6	6						0	
630	1	0.472	37	1.456	1	0.472	1	0.039	7.938		7.48	4.65	17000	2200	0.058
1	2	4		7	2	4		4		6				0	
630	1	0.590	42	1.653	1	0.511	1	0.039	7.938	7	8.8	5.43	16000	2000	0.082
2	5	6		6	3	8		4						0	
630	1	0.669	47	1.850	1	0.551	1	0.039	8.731	7	10.45	6.5	15000	1900	0.11
3	7	3		4	4	2		4						0	
630	2	0.787	52	2.047	1	0.590	1.	0.043	9.525	7	12.26	7.81	13000	1700	0.14
4	0			2	5	6	1	3						0	
630	2	0.984	62	2.440	1	0.669	1.	0.043	11.5	7	17.22	11.39	10000	1400	0.22
5	5	3		9	7	3	1	3						0	
630	3	1.181	72	2.834	1	0.748	1.	0.043	12	8	20.77	14.17	9000	1200	0.33
6	0	1		6	9		1	3						0	
630	3	1.378	80	3.149	2	0.826	1.	0.059	13.49	8	25.66	17.92	8000	1000	0.41
7	5			6	1	8	5	1	4					0	

6308	40	1.5784	90	3.5433	23	0.9056	1.0595	15.081	8	31.35	22.38	7000	9000	0.6
6309	45	1.7717	100	3.9370	25	0.9843	1.0595	17.462	8	40.66	30	6300	7500	0.77
6310	50	1.9685	110	4.3307	27	1.0637	2.0788	19.058	8	47.58	35.71	6000	7000	1.03
6311	55	2.1653	120	4.7244	29	1.1419	2.0788	20.638	8	55.05	41.91	5600	6700	1.367
6312	60	2.3622	130	5.1181	31	1.2205	2.0827	22.225	8	62.88	48.6	5000	6000	1.71
6313	65	2.59	140	5.5118	33	1.2992	2.0827	24	8	72.21	56.68	4500	5300	2.1
6314	70	2.7559	150	5.9055	35	1.3781	2.0827	25.4	8	80.1	63.48	4300	5000	2.55

ITE M	Shape Dimension (mm)								Steel Ball		Basic Load Rating (KN)		Max Speed (rpm)		Weight (kg)
	Bore d		Outer Diameter D		Width B		Radius r min		Size mm	Quantity Number	Dynamic Cr	Static Cor	Grease	Oil	
	m	inch	m	inch	m	inch	mm	inch							
	m		m		m										
6800 Series															
6800	10	0.3937	19	0.7480	59	0.1969	0.0113	2.388	9	1.83	2.381	26000	3400	0.0050	
6801	12	0.4724	21	0.8268	59	0.1969	0.0113	2.388	12	1.92	2.381	22000	3000	0.0060	
6802	15	0.5906	24	0.9449	59	0.1969	0.0113	2.388	14	2.08	2.381	20000	2800	0.0070	
6803	17	0.6693	26	1.0236	59	0.1969	0.0113	2.388	15	2.81	2.381	19000	2600	0.0080	
6804	20	0.7874	32	1.2598	70	0.2756	0.0113	3.538	13	4	3.5	17000	2200	0.0190	
6805	25	0.9843	37	1.4567	70	0.2756	0.0113	3.538	15	4.3	3.5	15000	1900	0.0220	
6806	30	1.1811	42	1.6535	70	0.2756	0.0113	3.178	19	4.7	3.175	13000	1700	0.0260	

680	3	1.378	4	1.850	7	0.275	0.0011	3.17	22	4.9	3.175	11000	1500	0.029
7	5	0	7	4		6	3	8	5				0	
680	4	1.578	5	2.047	7	0.275	0.0011	3.17	22	5.1	3.175	9000	1300	0.033
8	0	4	2	2		6	3	8	5				0	
680	4	1.771	5	2.283	7	0.275	0.0011	3.17	24	6.4	3.175	7000	1100	0.04
9	5	7	8	5		6	3	8	5				0	
681	5	1.968	6	2.559	7	0.275	0.0011	3.17	24	6.6	3.175	5000	9000	0.052
0	0	5	5	1		6	3	8	5					

ITEM	Shape Dimension (mm)								Steel Ball		Basic Load Rating (KN)		Max Speed (rpm)		Weight (kg)
	Bore		Outer Diameter		Width		Radius		Size	Quantity	Dynamic	Static	Grease	Oil	
	d	D	B	r min	Cr	Cor									
	mm	inch	mm	inch			mm	inch	mm	inch	mm	Number			
6900 Series															
6900	10	0.3937	22	0.8661	6	0.2362	0.3	0.0118	2.381	12	2.7	1.27	25000	32000	0.009
6901	12	0.4724	24	0.9449	6	0.2362	0.3	0.0118	3.5	9	2.89	1.46	20000	28000	0.011
6902	15	0.5906	28	1.1024	6	0.2362	0.3	0.0118	3.969	10	4.1	2.06	19000	26000	0.016
6903	17	0.6693	30	1.1811	7	0.2756	0.3	0.0118	3.969	11	4.65	2.58	18000	24000	0.018
6904	20	0.7874	37	1.4567	7	0.2756	0.3	0.0118	4.763	11	6.4	3.7	17000	22000	0.036
6905	25	0.9843	42	1.6535	9	0.3543	0.3	0.0118	4.763	13	7.05	4.56	14000	18000	0.042
6906	30	1.1811	47	1.8504	9	0.3543	0.3	0.0118	4.763	14	7.25	5	12000	16000	0.048
6907	35	1.3780	55	2.1654	10	0.3937	0.3	0.0118	5.953	13	11.2	7.45	10000	14000	0.074
6908	40	1.5784	62	2.4409	12	0.4724	0.3	0.0118	6.747	14	14.5	10.2	8000	12000	0.11
6909	45	1.7717	68	2.6772	12	0.4724	0.3	0.0118	6.747	14	15.1	11.2	6000	10000	0.128
6910	50	1.9685	72	2.8346	12	0.4724	0.3	0.0118	6.747	15	15.6	12.2	4000	8000	0.132

Related Keywords: [Deep Groove Ball Bearing](#) [Double Row Deep Groove Ball Bearing](#) [Miniature Deep Groove Ball Bearings](#)

Email: andyfung.china@gmail.com ; asiabearings@gmail.com

Homepage: www.asiabearings.com